


AS1932E MOBILE ELEVATING WORK PLATFORM

Offering an electric motor drive configuration, the Pettibone AS1932E mobile elevating work platform provides personnel with a reliable, reinforced lift for safely working indoors at heights up to 25.6 feet.



SPECIFICATIONS

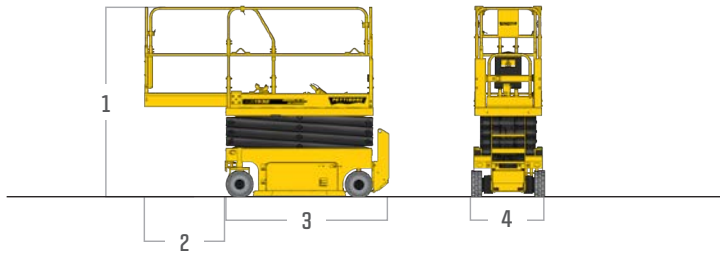

DIMENSIONS

| | |
|-----------------------------|--|
| 1 Overall Height | 6' (183 cm) - rails down 7' (213 cm) - rails up |
| 2 Platform Extension | 3' (91 cm) |
| 3 Overall Length | 6.1' (186 cm) |
| 4 Overall Width | 2.7' (82 cm) |
| Work Height | 25.6' (780 cm) |
| Machine Weight | 3,571 lbs (1,620 kg) |

PERFORMANCE

| | |
|-----------------------------------|--|
| Platform Capacity | 510 lbs (231 kg) |
| On-Deck Extension Capacity | 265 lbs (120 kg) |
| Platform Occupants | 2 - indoor 1 - outdoor |
| Drive Speed | Lowered: 2.5 ± 0.12 mph (4.0 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h) |
| Lift Time | 16 ± 2 seconds |
| Lower Time | 28 ± 3 seconds |
| Gradeability | 25% |
| Maximum Slope | 1.5° / 3° |
| Maximum Ground Pressure | 149.2 psi |
| Inside Turning Radius | 18" (46 cm) |
| Outside Turning Radius | 5.74' (175 cm) |
| Standards Compliance | ANSI A92.20 CSA-B354.6 |

FEATURES & OPTIONS

FEATURES

| | |
|---|--|
| Optimized electronic control system | Motion alarm |
| Universal drive control box | Flashing beacon/buzzer |
| Proportional control | Emergency descent |
| Quick disconnect for control box | Descent alarm and protection |
| Emergency stop device | Overload alarm |
| Platform power 120VAC (GFCI) | Horn/hour meter |
| Foot pedal control for platform extension | 4x2 drive |
| Fold-in guard rails | Extra wide, non-marking tires |
| Self-closing, self-catching entry gate | Pothole guards |
| Lanyard anchor point | Two-wheel brake |
| Large scissor arms | Manual brake release |
| Pressure transducer | Advanced battery charger with voltage protection |
| Full-height drive | Slide-out component tray |
| Intelligent diagnostic system | Charging status indicator |
| Tilt sensor and alarm | Charging operation limit |
| Slope sensor | |

* Specifications are subject to change.

PETTIBONE

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 800.467.3884
info@gopettibone.com
www.gopettibone.com



1 Year

Full machine and attachment

**2 Years
or 2,000 hrs**

Electric drive motor

5 Years

Frame weldment, scissor stacks & platform weldment

WARRANTY