


# AS3246E MOBILE ELEVATING WORK PLATFORM

Offering an electric motor drive configuration, the Pettibone AS3246E mobile elevating work platform provides personnel with a reliable, reinforced lift for safely working indoors at heights up to 39.4 feet.



# SPECIFICATIONS

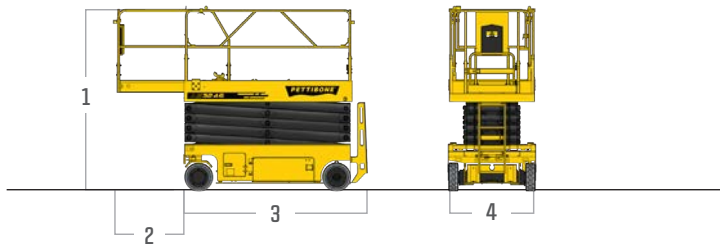

## DIMENSIONS

1	<b>Overall Height</b>	6.1' (186 cm) - rails down 8' (244 cm) - rails up
2	<b>Platform Extension</b>	3' (91 cm)
3	<b>Overall Length</b>	8.1' (247 cm)
4	<b>Overall Width</b>	3.9' (119 cm)
	<b>Work Height</b>	39.4' (1,201 cm)
	<b>Machine Weight</b>	6,614 lbs (3,000 kg)

## PERFORMANCE

<b>Platform Capacity</b>	705 lbs (320 kg)
<b>On-Deck Extension Capacity</b>	265 lbs (120 kg)
<b>Platform Occupants</b>	2 - indoor 1 - outdoor
<b>Drive Speed</b>	Lowered: 2.2 ± 0.12 mph (3.5 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)
<b>Lift Time</b>	58 ± 4 seconds
<b>Lower Time</b>	48 ± 4 seconds
<b>Gradeability</b>	25%
<b>Maximum Slope</b>	2° / 3°
<b>Maximum Ground Pressure</b>	173.8 psi
<b>Inside Turning Radius</b>	13" (33 cm)
<b>Outside Turning Radius</b>	7.5' (229 cm)
<b>Standards Compliance</b>	ANSI A92.20 CSA-B354.6

# FEATURES & OPTIONS

## FEATURES

Optimized electronic control system	Motion alarm
Universal drive control box	Flashing beacon/buzzer
Proportional control	Emergency descent
Quick disconnect for control box	Descent alarm and protection
Emergency stop device	Overload alarm
Platform power 120VAC (GFCI)	Horn/hour meter
Foot pedal control for platform extension	4x2 drive
Fold-in guard rails	Extra wide, non-marking tires
Self-closing, self-catching entry gate	Pothole guards
Lanyard anchor point	Two-wheel brake
Large scissor arms	Manual brake release
Pressure transducer	Advanced battery charger with voltage protection
Full-height drive	Slide-out component tray
Intelligent diagnostic system	Charging status indicator
Tilt sensor and alarm	Charging operation limit
Slope sensor	

\* Specifications are subject to change.

**PETTIBONE**

## PETTIBONE, LLC

1100 Superior Avenue  
Baraga, MI 49908

P: 800.467.3884  
info@gopettibone.com  
www.gopettibone.com

**1 - 2 - 5  
WARRANTY**

1 Year

Full machine and attachment

2 Years  
or 2,000 hrs

Electric drive motor

5 Years

Frame weldment, scissor stacks & platform weldment

## WARRANTY