

PETTIBONE®


» TRAVERSE T1157

SPECIFICATIONS





The Traverse™ T1157 from Pettibone® is ruggedly built and engineered to deliver results for the long haul. High lift capacity and reach, along with 70 inches of horizontal boom transfer, makes easy work of landing loads. The T1157 also offers exceptional operator visibility and superior maneuverability for enhanced efficiency. Responsive hydraulics ensure smooth operation for any job application.

SPECIFICATIONS

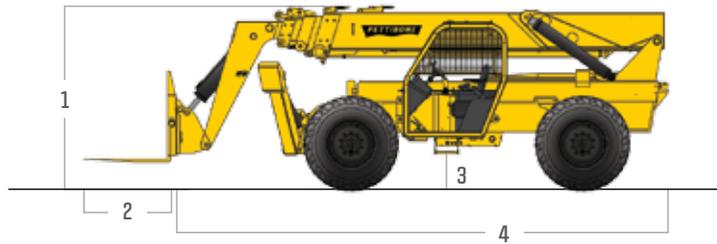

DIMENSIONS	
1 Height	8' 4" (254 cm) boom down
2 Fork Carriage	48" (122 cm) standard
3 Ground Clearance	18.8" (48 cm)
4 Length	24' 5" (744 cm) to fork frame
Overall Width	8' 6" (259 cm)
Pallet Forks	2.25 x 4 x 48" standard
Total Operating Weight	37,000 lbs (16,783 kg)
ENGINE	
Model/Power	110 HP (82 kW) Cummins® Tier III turbo diesel with electronic control & protection
Fuel Tank	32.6 gal. (123 L)
HYDRAULIC SYSTEM	
Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
PERFORMANCE	
Max Load Capacity	11,000 lbs (4,990 kg)
Maximum Lift Height	57' 6" (1,753 cm)
Maximum Forward Reach	48' 9" (1,486 cm) at 24" LG
Below Grade Reach	3' 11" (119 cm)
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	13' (396 cm)
Transfer	5' 10" (178 cm) horizontal boom travel
Frame	24° of leveling (12° right and left); rear axle stabilization system; mounted outriggers
Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
Axles	Carraro outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel, and crab steer
Brakes	Oil-immersed inboard disc service brakes, electronically actuated spring applied hydraulic release park brake
Tires	14.00 x 24 16 ply
Boom	Automatic fork leveling without slave cylinders; 4 section roller boom

LIFT PERFORMANCE

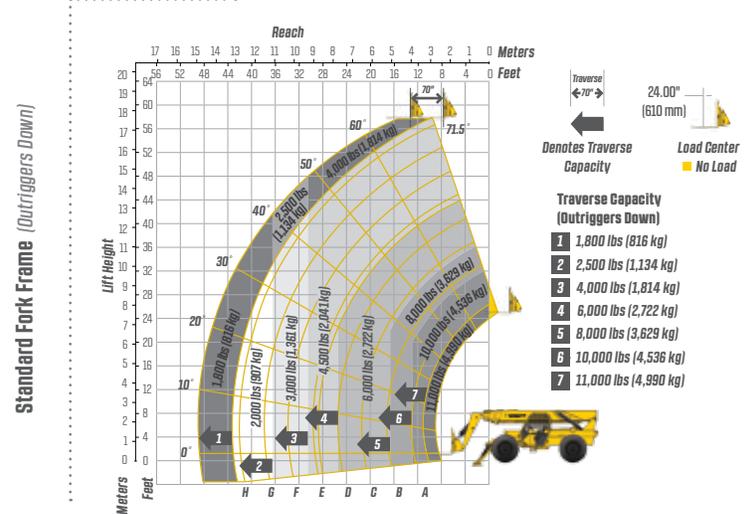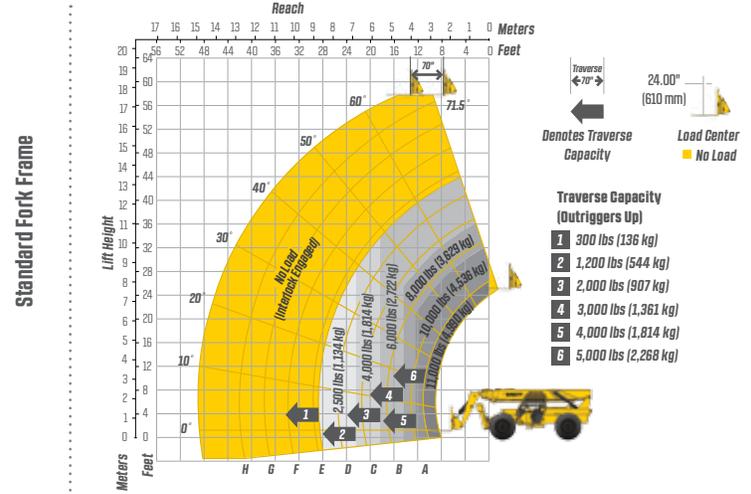

FEATURES & OPTIONS

OPERATOR CAB	
Adjustable suspension seat with seat belt	Machine level indicator
Fully adjustable right-side armrest	Single multifunction hydraulic joystick
Cab step	ROPS/FOPS
AVAILABLE ATTACHMENTS	
Pallet, lumber and block forks	Truss boom
Side tilt carriages +/- 10°	Utility buckets
OPTIONS	
Light packages	Enclosed cab (HWD)
Foam-filled tires	

* Specifications are subject to change.



PETTIBONE, LLC
 1100 Superior Avenue
 Baraga, MI 49908
 P: 800.467.3884
 info@gopettibone.com
 www.gopettibone.com



WARRANTY	Details
1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure